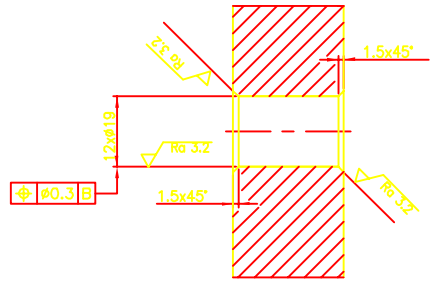

SECTION H–H
(SCALE 1/1)

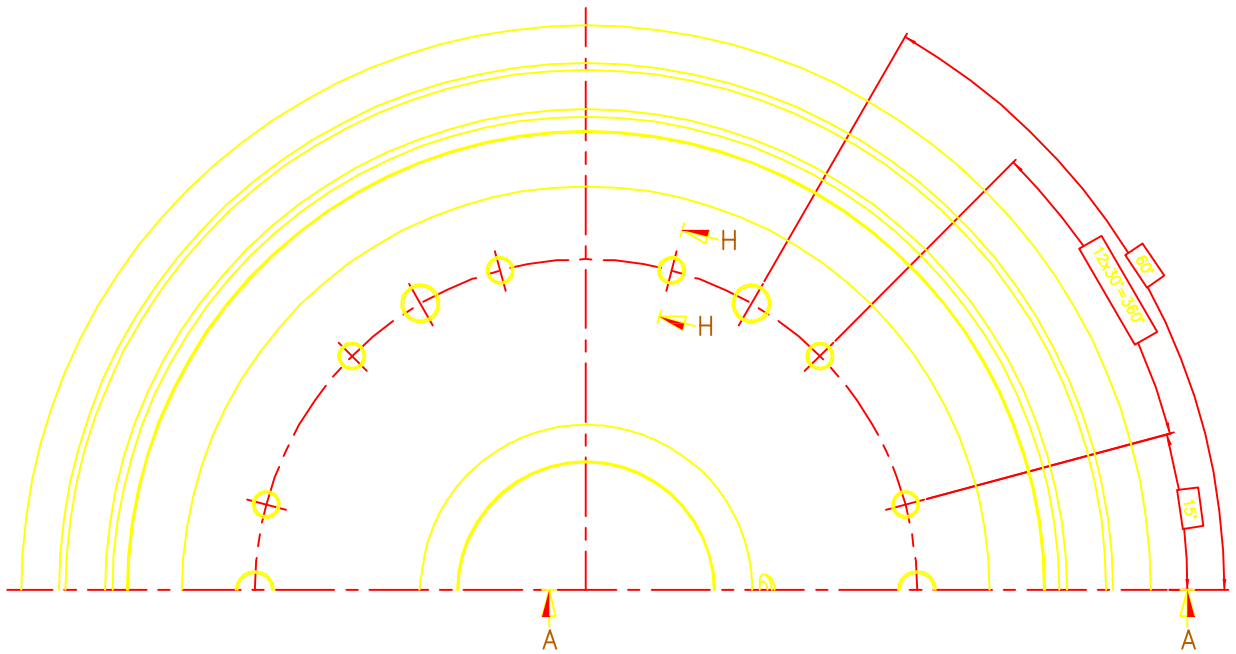

NOTES:

1. ANY SLIGHT TAPER WITHIN THE PERMITTED TOLERANCE SHALL BE ON THE CONDITION THAT THE LARGER DIAMETER IS AT THE INBOARD SIDE OF THE HUB.
2. THE DRAWING IS ALSO VALID FOR DELIVERY OF SEPARATE SOLID WHEELS WITH ROUGH BORE ø201–2, ROUGHNESS Ra 12.5
3. MAXIMUM STATIC IMBALANCE IS 125 gm.(E3)
4. DESIGN AND MANUFACTURE ACCORDING TO EN13262, CATEGORY 2.
5. THE SOLID WHEEL IS SPECIFIED FOR LOAD OF AXLE 17 TON.

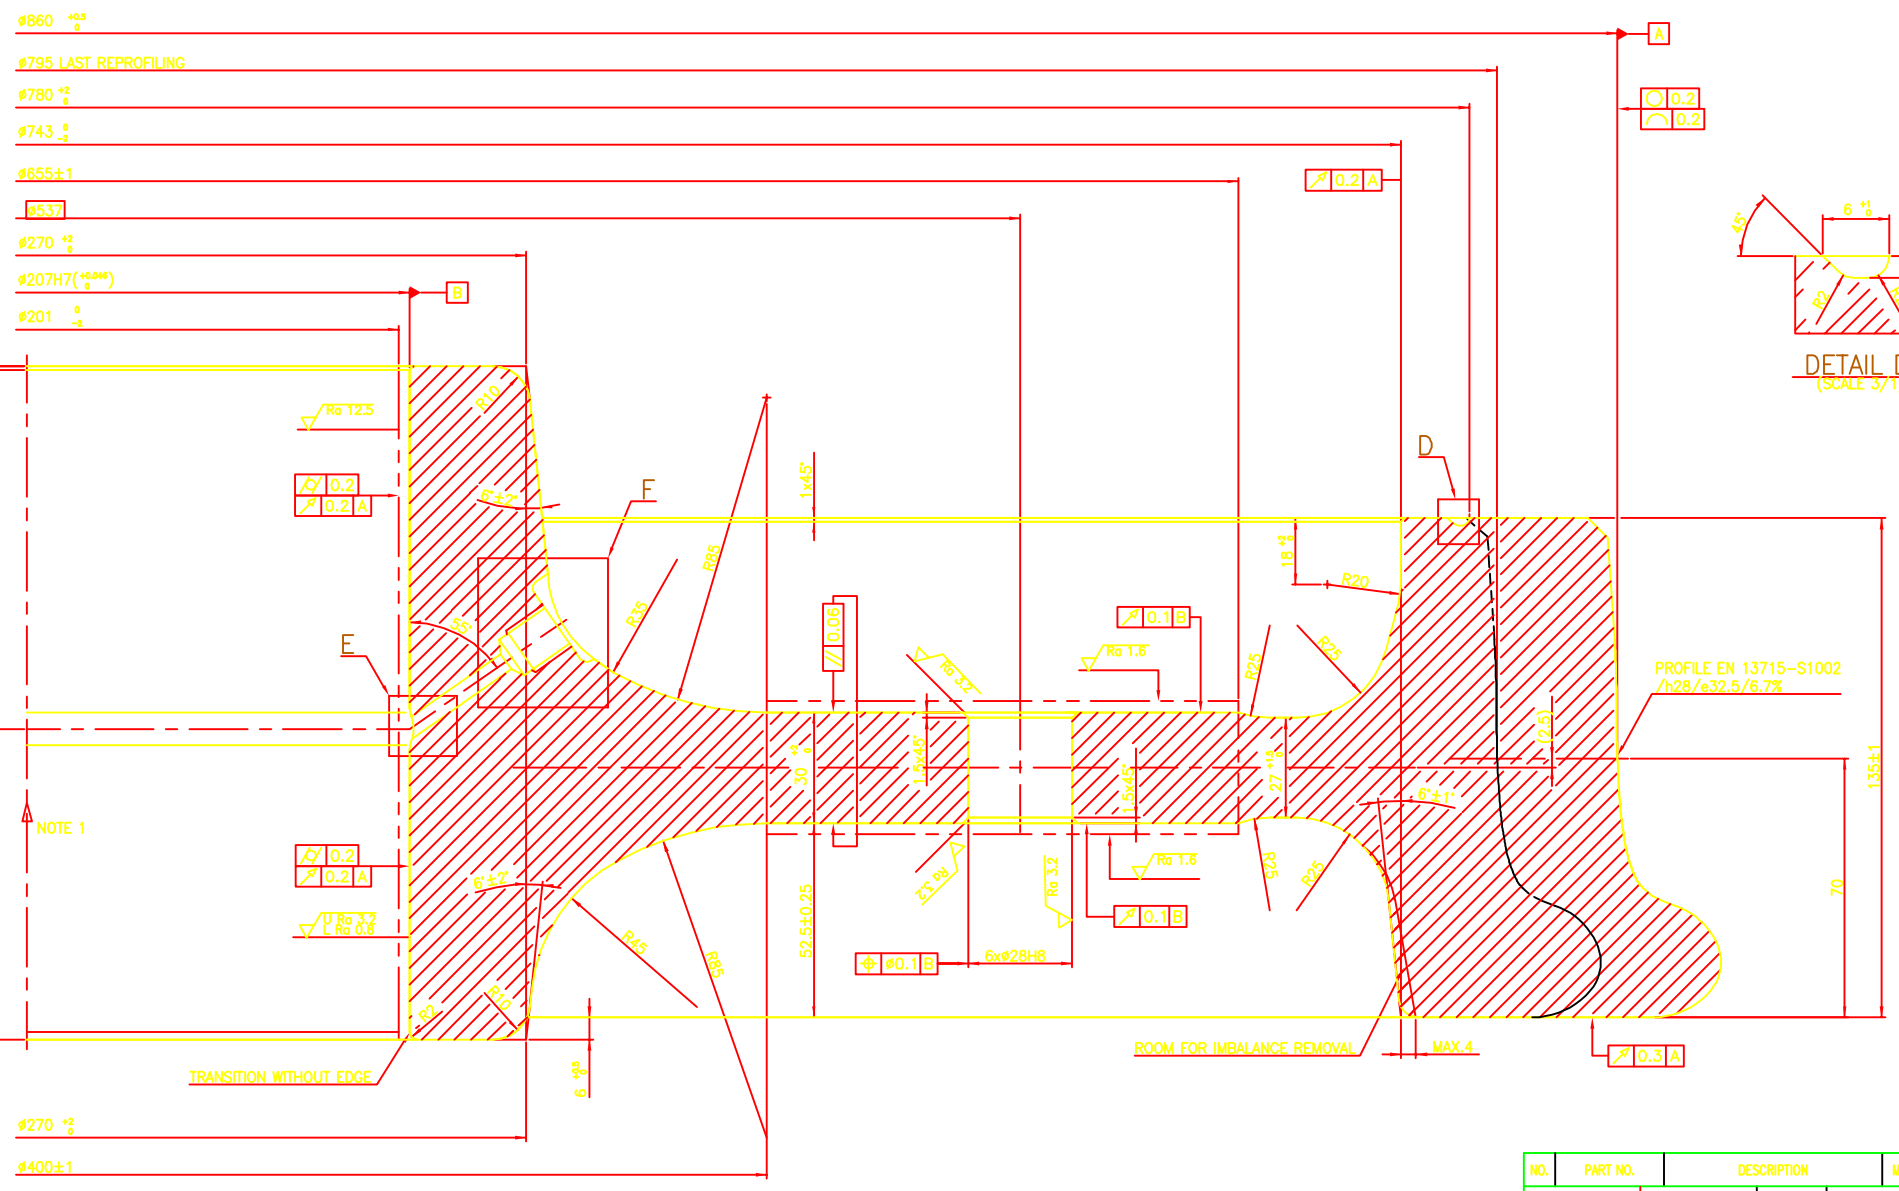

SECTION A–A
(SCALE 1/1)



DETAIL F
(SCALE 1/1)

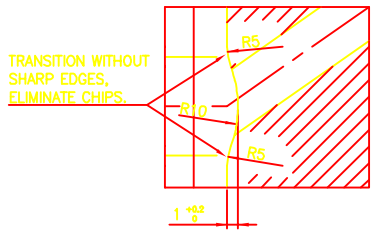

DETAIL E
(SCALE 3/1)



DETAIL D
(SCALE 3/1)

NO.	PART NO.	DESCRIPTION	MATERIAL	QTY	W.T	REMARKS

TOLERANCES ON SURFACE ISO 1302		TOLERANCES OTHER THAN SPECIFIED ISO 2768mK
DRN	J.H.JUNG	21.11.2007
CHK	H.S.OH	18.04.2008
APP	C.G.KIM	18.04.2008

SIZE A1 | MAT'L | EN8 CATEGORY 2 | OEM Drawing No.

TITLE: WHEEL, FORGED STEEL

DRG. NO: TRP09106AB/RS3 | Ver. | Rev.

SCALE 1/3 | SHEET 1 OF 1

DELHI METRO RAIL CORPORATION

MARK	DATE	DETAIL OF REVISION(E.C ZONE)	E.C NO.	DGN	CHK	APP

PROPERTY OF ISSUING ENTITY. CANNOT BE DISTRIBUTED OR REPRODUCED WITHOUT AUTHORIZATION. AutoCAD